



2215 North 30th Street, Suite 300, Tacoma, WA 98403-3350
253.383.2422 TEL 253.383.2572 FAX
www.ahbl.com

ADDENDUM NO. 02

February 8, 2017

Project: Camp Murray Beach Sewer Maintenance & Historical Dist. Sewer Repairs Washington Military Department, State Project #2016-644/645

The additions, clarifications, and corrections herein shall be made to the Project Manual, Drawings, and Schedules for the above-referenced project, and shall be included in the scope of work and proposals to be submitted. References made below to the Project Manual and Drawings shall be used as a general guide only. The Bidders themselves shall determine the work affected by the Addendum items.

GENERAL ITEMS

Item #G01 Beach Sewer Maintenance

ADD #02: WORK RESTRICTIONS

Refer to specification section 011000, SUMMARY OF WORK, part 1.5C for Beach work restrictions.

Item #G02 Beach Sewer Maintenance

ADD #02: TREE PROTECTION

The sewer alignments will be revised to protect all existing trees. No trees will be removed under the Beach scope of work.

CIVIL DRAWINGS

Item #CD01 C2.1 Historical District Sewer Site Plan

ADD #02 **REVISE** sewer gravity and force main alignments shown on sheet C2.1 to protect existing tree. Refer to attachment C2.1 for Addendum revisions.

Contractor is responsible to apply these revisions to all affected sheets.

Item #CD01 C2.2 Demolition and TESC Plan

ADD #02 **REPLACE PLAN NOTE.** Plan note "REMOVE TREE" shall be replaced with "PROTECT TREE". No trees are proposed for removal at the Beach Site. Root cutting will be required.


ATTACHMENTS

1. C2.1: BEACH SEWER MAINTENANCE – ADDENDUM 2 REVISIONS







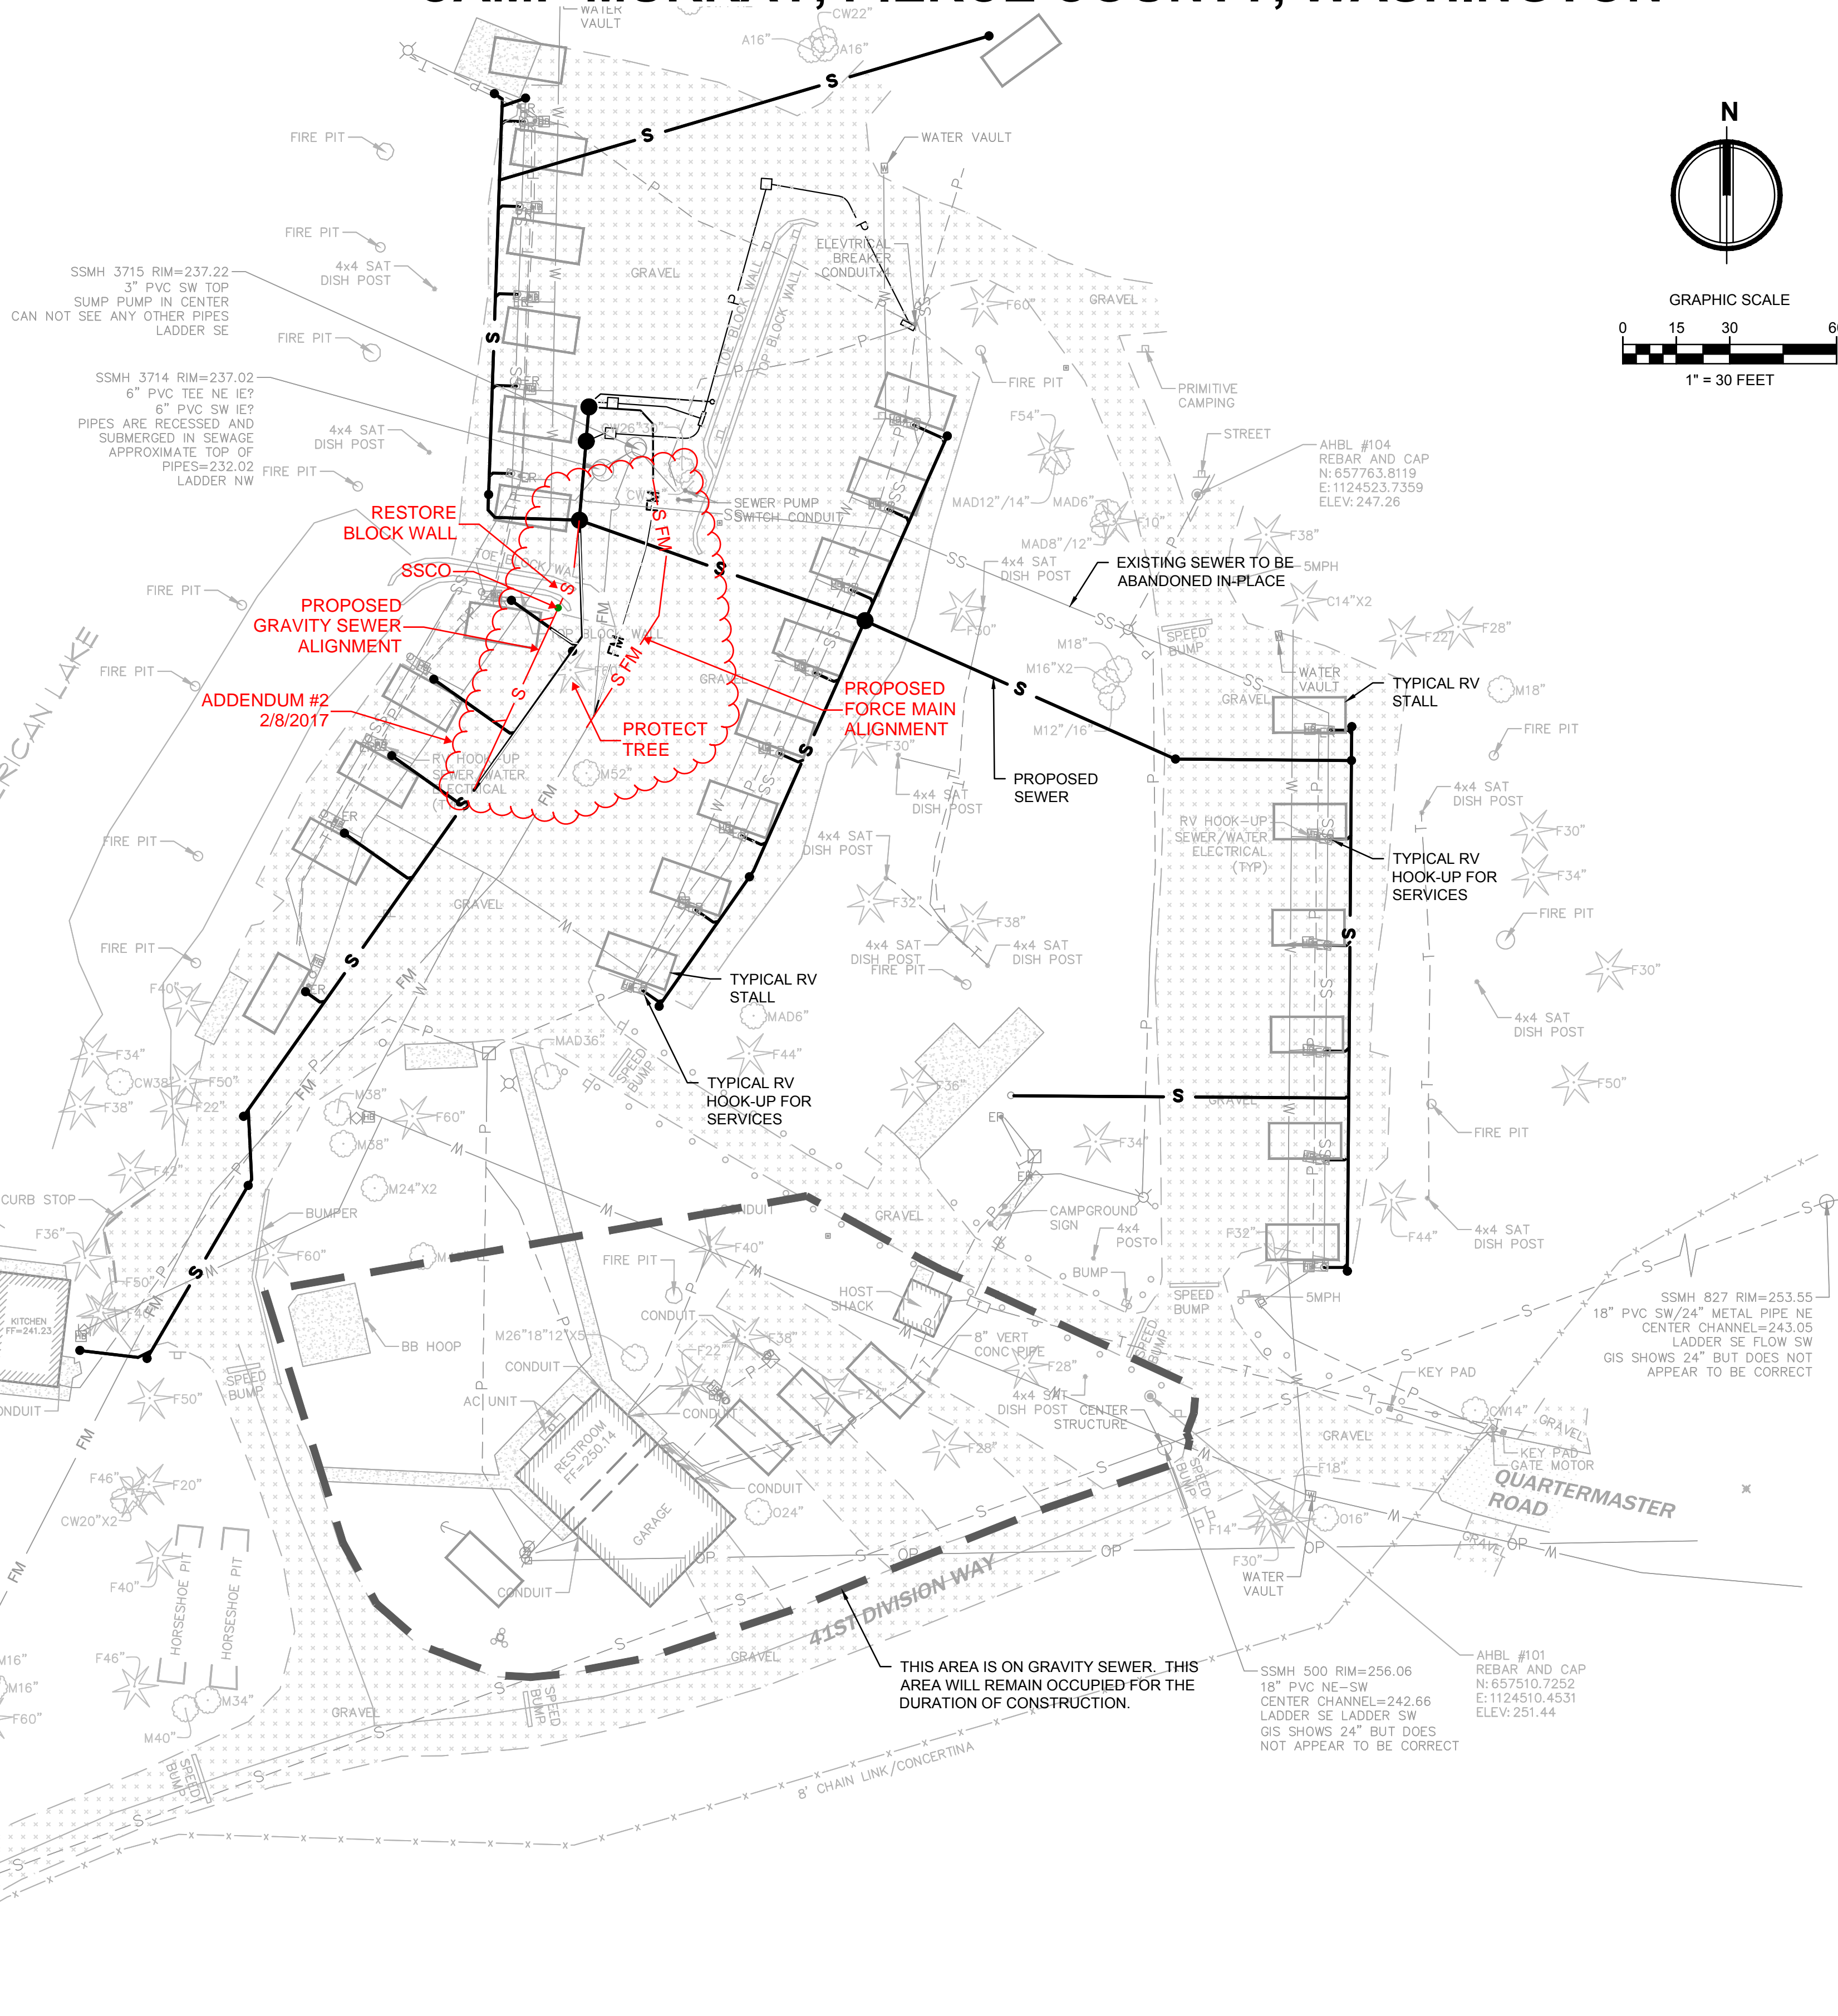













END OF ADDENDUM




CAMP MURRAY BEACH SEWER MAINTENANCE



EXISTING	PROPOSED
----------	----------

EXISTING		PROPOSED
	SET REBAR AND CAP	
	BOLLARD	
	SIGN	
	SANITARY SEWER CLEANOUT	
	SANITARY SEWER MANHOLE	
	GUY ANCHOR	
	UTILITY POWER POLE	
	JUNCTION BOX	
ER	ELECTRICAL RISER	
	POWER METER	
	TELEPHONE RISER	
	HOSE BIB	
	IRRIGATION CONTROL VALVE	
	WATER VAULT	
	C-CEDAR, F-FIR	
	A-ALDER, CW-COTTONWOOD	
	M-MAPLE, MAD-MADRONE	
	O-OAK	
— — — — — SS	SEWER LINE	— — — — — S
— — — — — FM	FORCE MAIN LINE	— — — — — FM
— — — — — W	WATER LINE PER GIS	
— — — — — P	ELECTRICAL LINE	— — — — — P
— — — — — T	COMMUNICATION LINE	
— — — — — OP	OVERHEAD UTILITIES	
x x x x x	FENCE	
	ASPHALT	
	CONCRETE	
	GRAVEL	

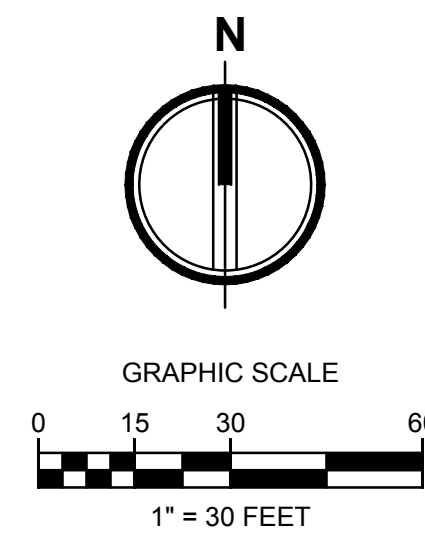

TRENCH NOTE

IF WORKERS ENTER ANY TRENCH OR OTHER EXCAVATION FOUR
OR MORE FEET IN DEPTH THAT DOES NOT MEET THE OPEN PIT
REQUIREMENTS OF WSDOT SECTION 2-09.3(3)B, IT SHALL BE
SHORED AND CRIBBED. THE CONTRACTOR ALONE SHALL BE
RESPONSIBLE FOR WORKER SAFETY AND AHBIL ASSUMES NO
RESPONSIBILITY. ALL TRENCH SAFETY SYSTEMS SHALL MEET
THE REQUIREMENTS OF THE WASHINGTON INDUSTRIAL SAFETY
AND HEALTH ACT, CHAPTER 49.17 RCW.

UTILITY LOCATE NOTES

THE LOCATIONS OF EXISTING UNDERGROUND UTILITIES ARE APPROXIMATE ONLY AND HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING UTILITIES BEFORE COMMENCING WORK AND AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES THAT HAPPEN DUE TO THE CONTRACTOR'S FAILURE TO LOCATE EXACTLY AND PRESERVE ANY AND ALL UNDERGROUND UTILITIES.

CONTRACTOR SHALL CONTACT UTILITY LOCATE AND COORDINATE WITH CAMP MURRAY PERSONNEL. AHBL ASSUMES NO LIABILITY FOR THE LOCATION OF UNDERGROUND UTILITIES.

IN ADDITION TO THE 811 UTILITY LOCATE SERVICE THE CONTRACTOR SHALL OBTAIN INDEPENDENT PRIVATE LOCATES FOR ALL UNDERGROUND UTILITIES INCLUDING ANY PRIVATE BURIED COMMUNICATIONS / DATA, ETC.

VERTICAL DATUM

BASED ON CAMP MURRAY VERTICAL BENCHMARKS PER CENTER
POINTE SURVEY (NGVD 29)

BASIS OF BEARING

NAD 83/91
WASHINGTON STATE PLANE COORDINATE SYSTEM, SOUTH ZONE
CAMP MURRAY HORIZONTAL CONTROL
HOLDING CENTER POINT SURVEY MONUMENT NUMBERS 13 AND 14.

PROJECT DESCRIPTION

ABANDON EXISTING SEWER PUMP STATION. PROVIDE ALL NEW GRAVITY SEWER PIPING & SERVICES TO SERVE BEACH RV AREA. PROVIDE ASSOCIATED SEWER PUMP STATION.

REQUIREMENTS

ALL WORK TO BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS AND THESE PLANS.



2215 North 30th Street, Suite 300 Tacoma, WA 98403
253.383.2422 TEL 253.383.2572 FAX www.ahbl.com WEB

Project Title:

CAMP MURRAY BEACH SEWER MAINTENANCE

STATE NO: 2016-644

Client:

STATE OF WASHINGTON
MILITARY DEPARTMENT

FACILITY MANAGEMENT OFFICE
BUILDING 36 QUARTERMASTER ROAD
CAMP MURRAY, WA 98430-5052

GARY WELLS

Job No.

AHBL NO: 2160669.10

Issue Set & Date:

BID SET

JAN.31, 2017



NOTICE

ALTERATION OF THIS DOCUMENT SHALL INVALIDATE THE PROFESSIONAL SEAL AND SIGNATURE. PUBLICATION OF THIS DOCUMENT DOES NOT DEROGATE FROM RESERVED OWNERSHIP RIGHTS IN IT. THIS DOCUMENT IS FOR USE ONLY FOR THE PROJECT IDENTIFIED IN THE TITLE BLOCK AND IS NOT TO BE USED FOR REPAIR, REMODEL OR ADDITION TO THAT PROJECT OR FOR ANY OTHER PROJECT.

4

3

 Δ^2 Δ

Revisions:

Sheet Title:

BEACH SEWER SITE PLAN

Designed by: RI Drawn by: RI Checked by: SK

Sheet No.

C2.1

4 of 12 Sheets